



COLONNETTES A SERTIR

Colonnette ouverte

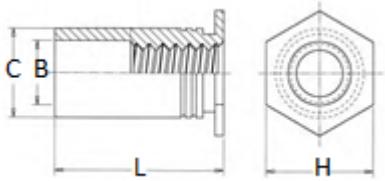

Colonnette borgne



COLONNETTES A SERTIR

DIAMETRE ISO métrique	Minimum Epais tôle m/m	Diamètre trou -0.00-+0.08 m/m	C Trou -0.00-+0.08	H mm/mm	Distance mini Entre l'axe et le bord m/m
2.5	>1.0	4.20	4.19	4.8	6.0
3.0	>1.0	4.20	4.19	6.4	6.7
3ALT	>1.0	5.40	5.39	6.4	6.7
4.0	>1.3	7.20	7.14	7.9	8.0
5.0	>1.3	7.20	7.14	7.9	8.0

Longueurs possible (L) :

ISO métrique	3	4	6	8	10	12	14	16	18	20	22	25
2.5	O	O	*	*	*	*	*	*	*	*	*	*
3.0	O	O	*	*	*	*	*	*	*	*	*	*
3.0ALT	O	O	*	*	*	*	*	*	*	*	*	*
4.0	O	O	*	*	*	*	*	*	*	*	*	*
5.0		O	*	*	*	*	*	*	*	*	*	*

(O) : Colonnette ouverte uniquement

MATIERE STANDARD :

Acier traité
Acier inox série 300, et série 400

FINITION STANDARD :

Zingué passivé blanc pour l'acier
Couleur naturelle pour l'inox